


## INSTALLATION INSTRUCTIONS

- (1) 'AR' RAIL SHOULD FIRST BE SET ON INSTALLED CURB SEAL AND FASTEN AS REQ'D. NOTE COMPRESSOR END SHOULD MATCH THAT OF UNIT ORIENTATION.
- (2) FABRICATE AND INSTALL DIVIDERS IN 'AR' RAIL TO MATCH OPENINGS IN BOTTOM OF UNIT
- (3) INSTALL FLEX BETWEEN CURB AND DIVIDERS
- (4) SET UNIT ON 'AR' RAIL SEAL AND FASTEN AS REQ'D
- (5) INSTALL EARTHQUAKE RESTRAINTS IF REQ'D ( SEE SEPARATE DRAWING)

NOTE: BE SURE TO SEAL BETWEEN DIVIDER AND UNIT BOTTOM

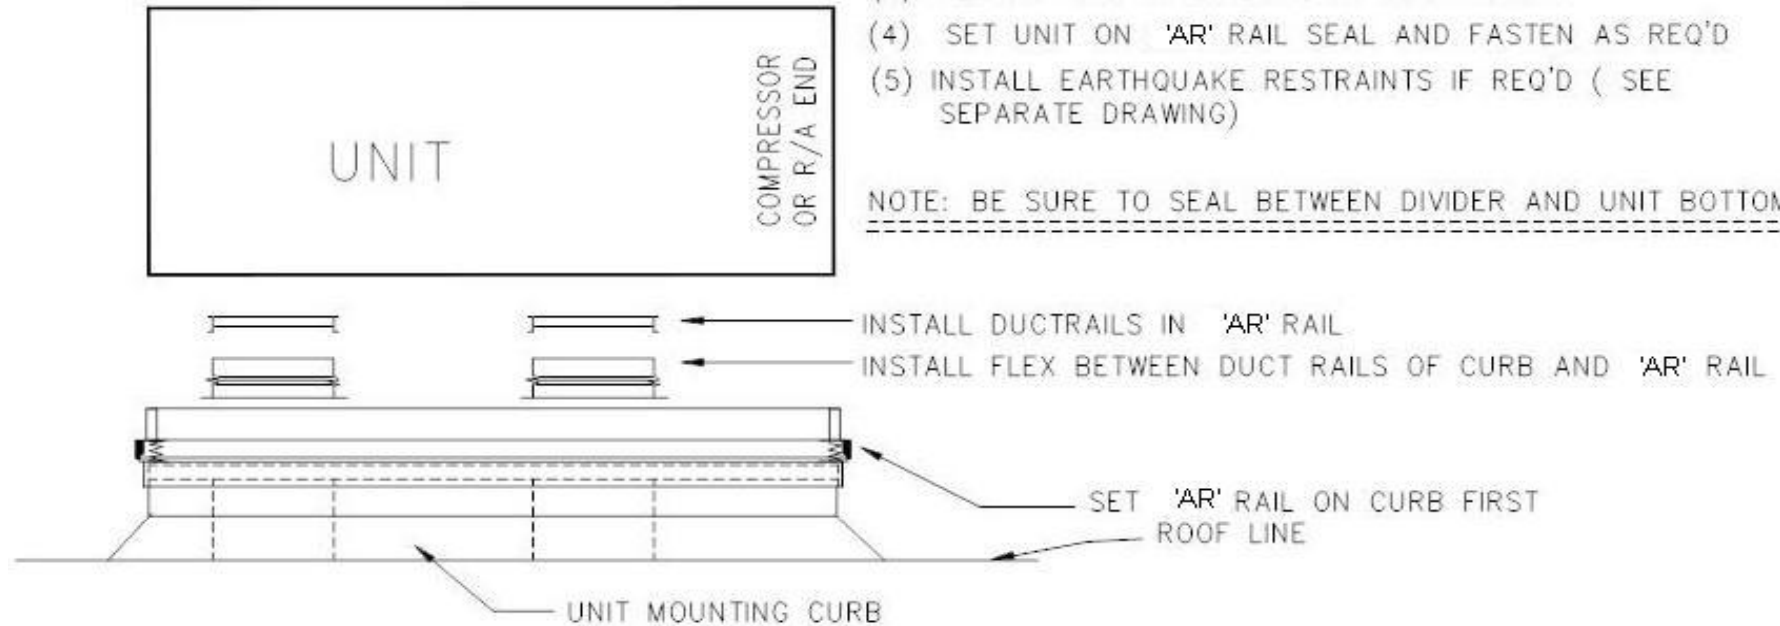

Notes / Remarks :

Project :  
 Client :  
 Consultant :  
 Representative :

Title :

**'AR' RAILS  
 installation  
 (optional method 1)**

Drawing no.  
**I-300011.02**

Rev. **0**