
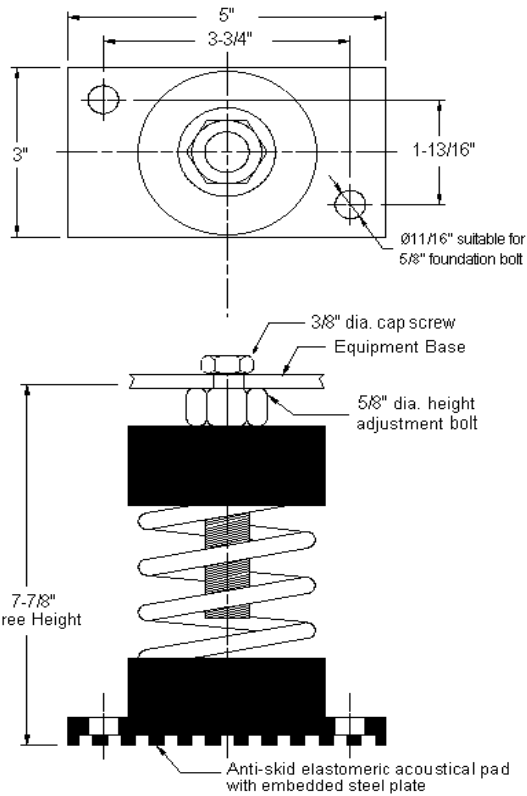


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S

NOTES

1. Isolators have a min. operating Kx/Ky ratio of 1.0
2. Springs have 50% additional travel to solid beyond rated load.
3. Isolators should be selected in the range of -30% to +25% of rated load.
4. Consult spring chart for isolator performance data.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
BT-181	86	130
BT-182	133	200
BT-183	180	270
BT-184	266	400
BT-185	486	730
BT-186	713	1070
BT-187	926	1390
BT-181-199	593	890
BT-182-199	633	950
BT-183-199	683	1025
BT-184-199	783	1175
BT-185-199	933	1400
BT-186-199	1233	1850
BT-187-199	1460	2190

FEATURES

- * Large diameter laterally stable springs
- * Weld-free construction
- * Anti-skid elastomeric acoustical base plate
- * Built-in leveling device
- * Mounting holes furnished as standard
- * Spring elements color-coded for easy field verification

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

BT
Free-standing Spring Mount
Rubber Base Plate Construction
(3" deflection)

Drawing no. **S-2035.21**
Rev. 1