
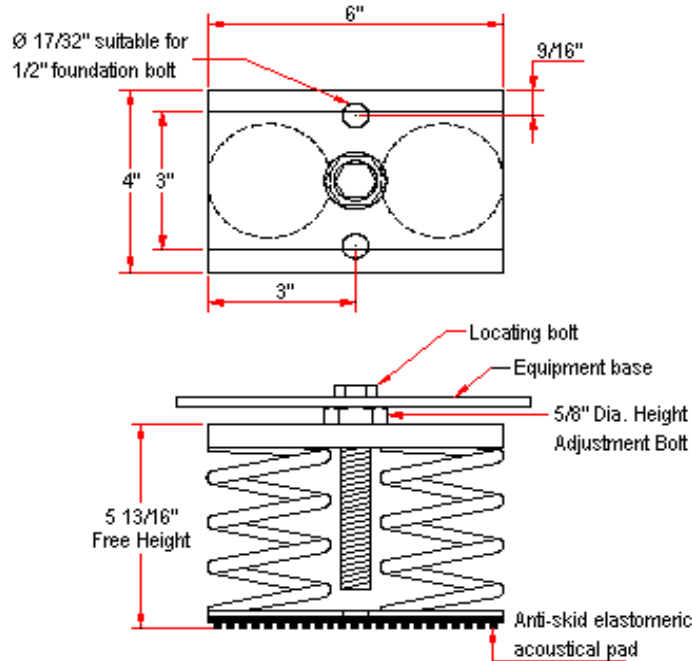


VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
OSM-2-140	132	200
OSM-2-141	266	400
OSM-2-142	500	750
OSM-2-143	666	1000
OSM-2-144	952	1428
OSM-2-147	1906	2860
OSM-2-148A	2522	3784
OSM-2-140-146B	920	1380
OSM-2-141-146B	1036	1556
OSM-2-142-146B	1300	1952
OSM-2-143-146B	1466	2200
OSM-2-144-146B	1752	2628
OSM-2-147-146B	2706	4060
OSM-2-148A-146B	3322	4984

FEATURES

- * Welded construction
- * Anti-skid elastomeric acoustical pad
- * Built-in leveling device
- * Mounting holes furnished as standard
- * Hot dip galvanized finish
- * High deflection, low natural frequency
- * Spring elements color-coded for easy field verification

NOTES

1. Isolators have a min. operating Kx/Ky ratio of 1.0
2. Springs have 50% additional travel to solid beyond rated load.
3. Isolators should be selected in the range of -30% to +25% of rated load.
4. Consult spring chart for isolator performance data.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

OSM-2
Free-standing Spring Mount
Welded Construction
(2" deflection)

Drawing no.

S-2050.12

Rev. 1