
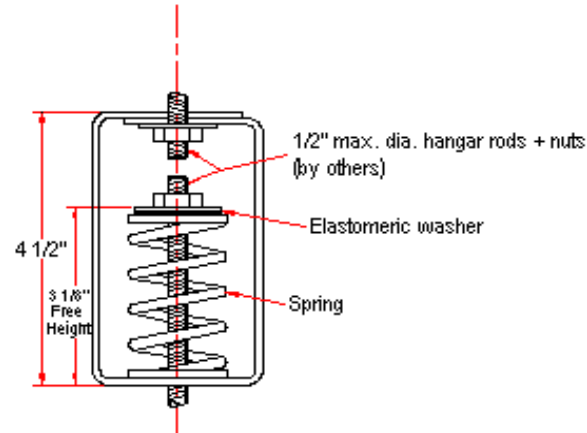




VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N. I. S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HSA-121	40	60
HSA-122	66	100
HSA-123	110	165
HSA-124	173	260
HSA-125	246	370
HSA-126	300	450
HSA-127	560	840

FEATURES

- * Spring elements color-coded for easy field verification
- * Load distribution steel washer

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HSA
Spring Hanger
(1" deflection)

Drawing no.
S-2100.01

Rev. 1