
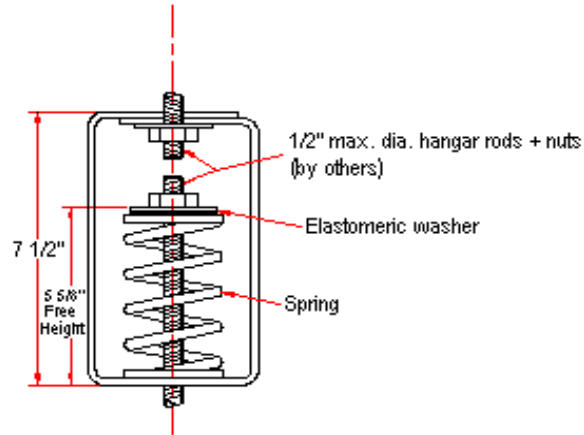




VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N. I. S.



Not applicable with booster springs

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HSB-140	66	100
HSB-141	133	200
HSB-142	250	375
HSB-143	333	500
HSB-144	476	714
HSB-147	953	1430
HSB-148A	1261	1892
HSB-140-146B	460	690
HSB-141-146B	518	778
HSB-142-146B	650	976
HSB-143-146B	733	1100
HSB-144-146B	876	1314
HSB-147-146B	1353	2030
HSB-148A-146B	1661	2492

FEATURES

- * Spring elements color-coded for easy field verification
- * High deflection, low natural frequency
- * Load distribution steel washer

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HSB
Spring Hanger
(2" deflection)

Drawing no.
S-2100.11

Rev. 1