
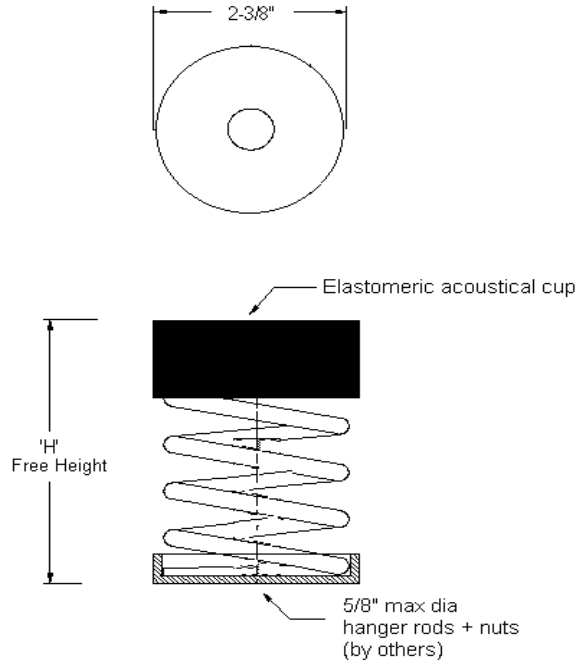


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	H (inches)
OHSA-121	40	60	3-3/8"
OHSA-122	66	100	
OHSA-123	110	165	
OHSA-124	173	260	
OHSA-125	246	370	
OHSA-126	300	450	
OHSA-127	560	840	
OHSA-101	56	85	4-5/8"
OHSA-102	76	115	
OHSA-103	113	170	
OHSA-104	150	225	
OHSA-105	216	325	
OHSA-106	300	450	
OHSA-107	400	600	
OHSA-108	500	750	
OHSA-109	600	900	
OHSA-110	733	1100	
OHSA-111	866	1300	
OHSA-112	1000	1500	

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

FEATURES

* Spring elements color-coded for easy field verification

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

OHSA
Open Spring Hanger
(1" deflection)

Drawing no.
S-2125.01

Rev. 0