
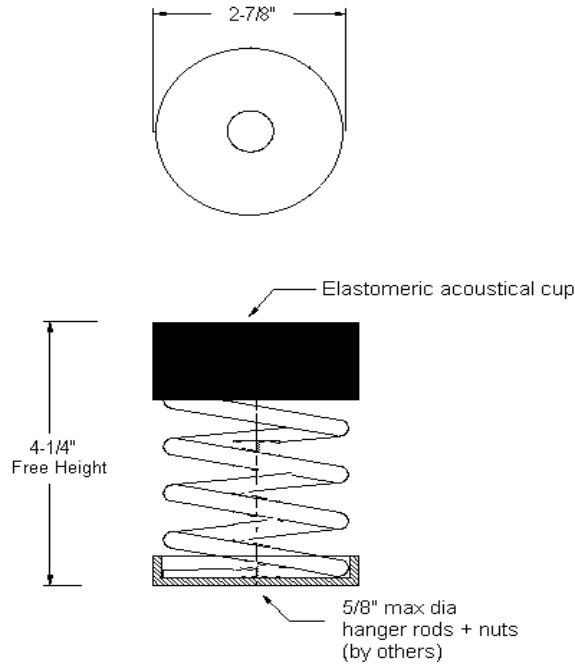


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
OHSD-150	83	125
OHSD-151	150	225
OHSD-152	216	325
OHSD-153	300	450
OHSD-154	400	600
OHSD-155	500	750
OHSD-156	600	900
OHSD-157	733	1100
OHSD-158	1200	1800
OHSD-159	1666	2500
OHSD-150-161	481	722
OHSD-151-161	532	799
OHSD-152-161	597	896
OHSD-153-161	666	1000
OHSD-154-161	750	1125
OHSD-155-161	871	1307
OHSD-156-161	1016	1525
OHSD-157-161	1108	1663
OHSD-158-161	1616	2425
OHSD-159-161	2083	3125

FEATURES

- * Spring elements color-coded for easy field verification

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

OHSD
Open Spring Hanger
(1" deflection)

Drawing no.
S-2125.02

Rev. 0