
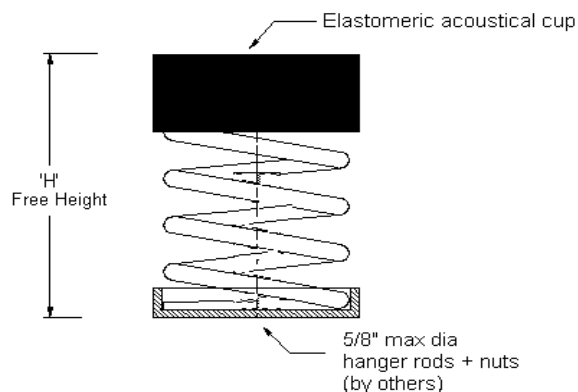



# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



N.T.S.

## NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	H (inches)
OHSA-081	32	48	4-5/8"
OHSA-082	50	76	
OHSA-083	89	134	
OHSA-084	158	237	
OHSA-085	280	420	
OHSA-086	360	540	
OHSA-087	485	728	
OHSA-140	66	100	5-5/8"
OHSA-141	133	200	
OHSA-142	250	375	
OHSA-143	333	500	
OHSA-144	476	714	
OHSA-147	953	1430	
OHSA-148A	1261	1892	
OHSA-140-146B	460	690	
OHSA-141-146B	518	778	
OHSA-142-146B	650	976	
OHSA-143-146B	733	1100	
OHSA-144-146B	876	1314	
OHSA-147-146B	1353	2030	
OHSA-148A-146B	1661	2492	

## FEATURES

\* Spring elements color-coded for easy field verification

Notes / Remarks :

Project :

Client :

Consultant :

Representative :

Title :

**OHSA**  
Open Spring Hanger  
(2" deflection)

Drawing no.

**S-2125.11**

Rev. 0