
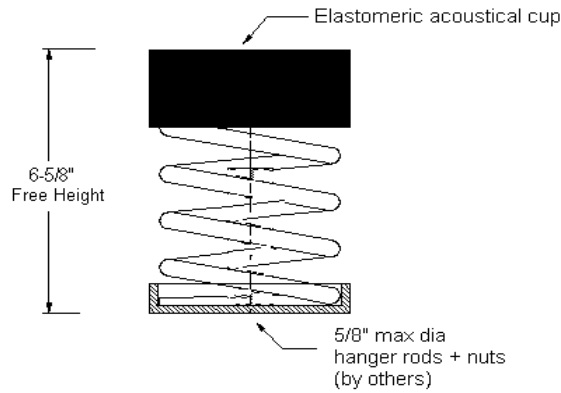



VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
OHSD-201	60	90
OHSD-202	100	150
OHSD-203	150	225
OHSD-204	250	375
OHSD-205	400	600
OHSD-206	700	1050
OHSD-207	926	1390
OHSD-201-219	593	890
OHSD-202-219	633	950
OHSD-203-219	683	1025
OHSD-204-219	783	1175
OHSD-205-219	933	1400
OHSD-206-219	1233	1850
OHSD-207-219	1460	2190

FEATURES

- * Spring elements color-coded for easy field verification

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

OHSD
Open Spring Hanger
(2" deflection)

Drawing no.
S-2125.12

Rev. 0