


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

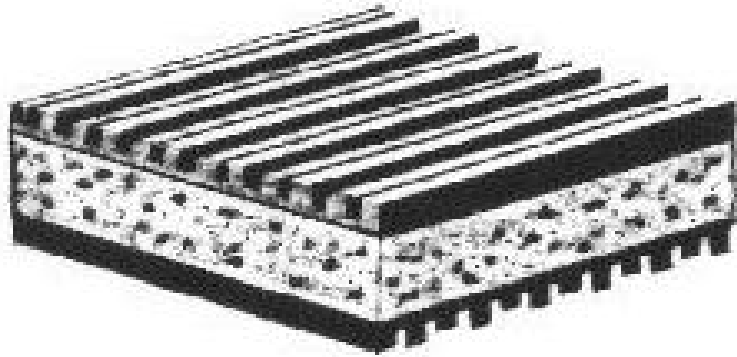

APPLICATION

- * Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)
- * Recommended for acoustic problem applications.


NOTES

1. Material: High quality ozone + water resistand elastomer blend, low density cork
2. Maximum loading: 60 lbs/sq.in.
3. Working range: 15 to 55 lbs/sq.in.
4. To order only 5/16" thick elastomer pad use model RP xxxx i/o CRMP xxxxx.

FEATURES

- * Alternate High-Low Rib construction.
- * Excellent sound attenuation capability.
- * No bolting required.
- * Simple field installation.

MODEL	SIZE (inches)
CRMP 181801	18" x 18" x 1"
CRMP 121201	12" x 12" x 1"
CRMP 080801	8" x 8" x 1"
CRMP 060601	6" x 6" x 1"
CRMP 040401	4" x 4" x 1"
CRMP 030301	3" x 3" x 1"
CRMP 020201	2" x 2" x 1"
CRMP 181802	18" x 18" x 2"
CRMP 121202	12" x 12" x 2"
CRMP 080802	8" x 8" x 2"
CRMP 060602	6" x 6" x 2"
CRMP 040402	4" x 4" x 2"
CRMP 030302	3" x 3" x 2"
CRMP 020202	2" x 2" x 2"
CRMP SSSSSS	SPECIAL (contact factory)



Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

CRMP
Cork-Rubber Mounting Pad

Drawing no. **S-2200.01**

Rev. 2