





VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)	'C' (inches)
HNSD-A4-150	83	125	1 1/4	1/2
HNSD-B2-151	150	225	1 3/4	5/8
HNSD-B3-152	216	325	1 3/4	5/8
HNSD-B3-153	300	450	1 3/4	5/8
HNSD-B4-154	400	600	1 3/4	5/8

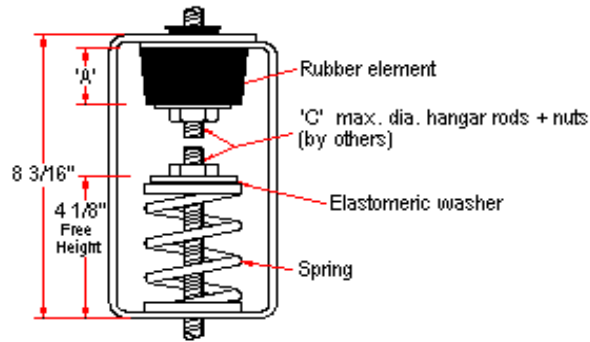

FEATURES

- * Load distribution steel washer
- * Embedded steel plates in rubber element for uniform loading.
- * Oil + water resistant rubber element
- * High deflection, low natural frequency
- * Spring / Rubber elements color-coded for easy field verification
(*Rubber element color coding can be by 'dot' or 'complete element'*)
- * Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

N.T.S.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Contact factory for optional drilling to accept larger hanger rod sizes.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HNSD
Neo-Spring™ Hanger
(1.5" deflection)

Drawing no.
S-2400.03

Rev. 2