





# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



Not applicable with booster springs

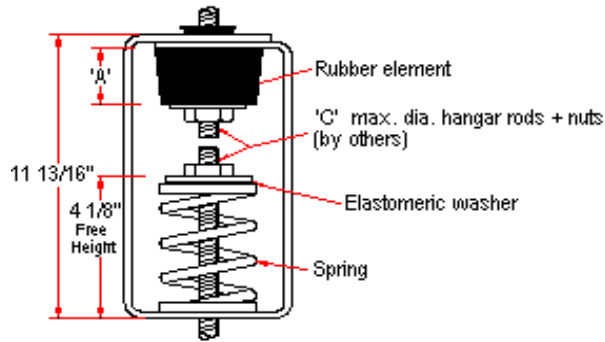

N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)	'C' (inches)
HNSE-C3-155	500	750	3 1/8	5/8
HNSE-C3-156	600	900	3 1/8	5/8
HNSE-C4-157	733	1100	3 1/8	5/8
HNSE-D2-158	1200	1800	3 1/8	3/4
HNSE-D2-159	1666	2500	3 1/8	3/4
HNSE-C3-150-161	481	722	3 1/8	5/8
HNSE-C3-151-161	532	799	3 1/8	5/8
HNSE-C3-152-161	597	896	3 1/8	5/8
HNSE-C4-153-161	666	1000	3 1/8	5/8
HNSE-C4-154-161	750	1125	3 1/8	5/8
HNSE-C4-155-161	871	1307	3 1/8	5/8
HNSE-D2-156-161	1016	1525	3 1/8	3/4
HNSE-D2-157-161	1108	1663	3 1/8	3/4
HNSE-D2-158-161	1616	2425	3 1/8	3/4
HNSE-D3-159-161	2083	3125	3 1/8	3/4

### FEATURES

- \* Load distribution steel washer
- \* Embedded steel plates in rubber element for uniform loading.
- \* Oil + water resistant rubber element
- \* High deflection, low natural frequency
- \* Spring / Rubber elements color-coded for easy field verification  
(*Rubber element color coding can be by 'dot' or 'complete element'*)
- \* Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

### NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Contact factory for optional drilling to accept larger hanger rod sizes.

Notes / Remarks :

Project :  
Client :  
Consultant :  
Representative :

Title :

**HNSE**  
**Neo-Spring™ Hanger**  
**(1.5" deflection)**

Drawing no.  
**S-2400.04**

Rev. 2