
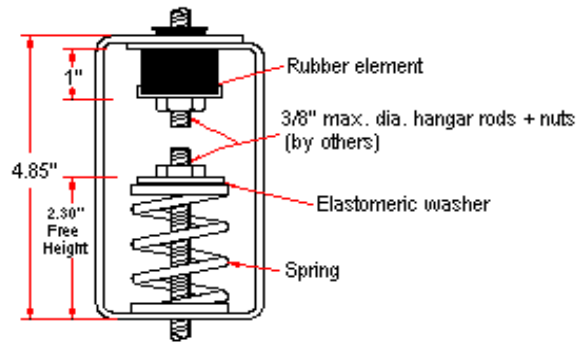




VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HNSF-HM-041	15	23
HNSF-HM-042	33	50
HNSF-HM-043	57	86
HNSF-HM-044	76	115
HNSF-HM-045	148	222

FEATURES

- * Oil + water resistant rubber element
- * Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HNSF
Neo-Spring™ Hanger
(1" deflection)

Drawing no.
S-2400.05

Rev. 1