





# VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



Not applicable with booster springs

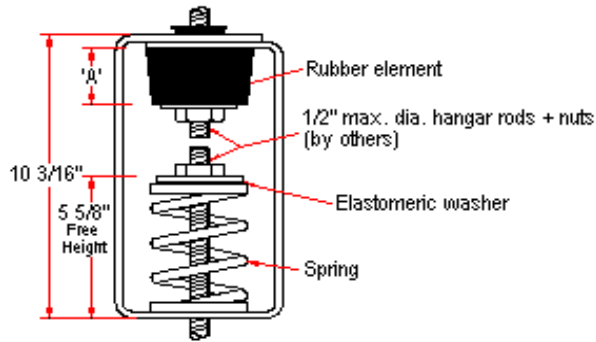

N.T.S.

### NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)
HNSB-A4-140	66	100	1 1/4
HNSB-B1-141	133	200	1 3/4
HNSB-B3-142	250	375	1 3/4
HNSB-B4-143	333	500	1 3/4
HNSB-C3-144	476	714	3
HNSB-C4-147	953	1430	3
HNSB-D2-148A	1261	1892	3
HNSB-C3-140-146B	460	690	3
HNSB-C3-141-146B	518	778	3
HNSB-C4-142-146B	650	976	3
HNSB-C4-143-146B	733	1100	3
HNSB-C4-144-146B	876	1314	3
HNSB-D2-147-146B	1353	2030	3
HNSB-D2-148A-146B	1661	2492	3

### FEATURES

- \* Load distribution steel washer
- \* Embedded steel plates in rubber element for uniform loading.
- \* Oil + water resistant rubber element
- \* High deflection, low natural frequency
- \* Spring / Rubber elements color-coded for easy field verification  
(*Rubber element color coding can be by 'dot' or 'complete element'*)
- \* Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

Notes / Remarks :

Project :  
Client :  
Consultant :  
Representative :

Title :

**HNSB**  
**Neo-Spring™ Hanger**  
(2.5" deflection)

Drawing no.  
**S-2400.11**

Rev. 3