





VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



Not applicable with booster springs

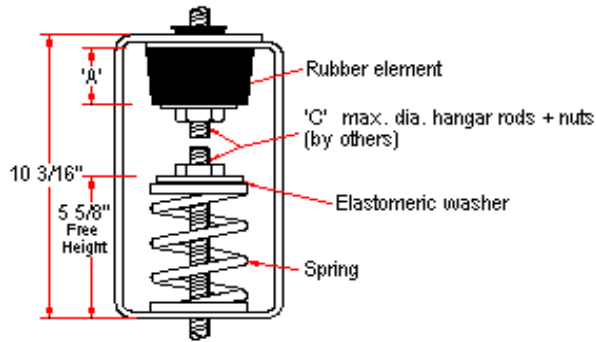

N.T.S.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)	'C' (inches)
HNSB-A4-140	66	100	1 1/4	1/2
HNSB-B1-141	133	200	1 3/4	5/8
HNSB-B3-142	250	375	1 3/4	5/8
HNSB-B4-143	333	500	1 3/4	5/8
HNSB-C3-144	476	714	3 1/8	5/8
HNSB-C4-147	953	1430	3 1/8	5/8
HNSB-D2-148A	1261	1892	3 1/8	5/8
HNSB-C3-140-146B	460	690	3 1/8	5/8
HNSB-C3-141-146B	518	778	3 1/8	5/8
HNSB-C4-142-146B	650	976	3 1/8	5/8
HNSB-C4-143-146B	733	1100	3 1/8	5/8
HNSB-C4-144-146B	876	1314	3 1/8	5/8
HNSB-D2-147-146B	1353	2030	3 1/8	5/8
HNSB-D2-148A-146B	1661	2492	3 1/8	5/8

FEATURES

- * Load distribution steel washer
- * Embedded steel plates in rubber element for uniform loading.
- * Oil + water resistant rubber element
- * High deflection, low natural frequency
- * Spring / Rubber elements color-coded for easy field verification
(*Rubber element color coding can be by 'dot' or 'complete element'*)
- * Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HNSB
Neo-Spring™ Hanger
(2.5" deflection)

Drawing no.
S-2400.11

Rev. 4