
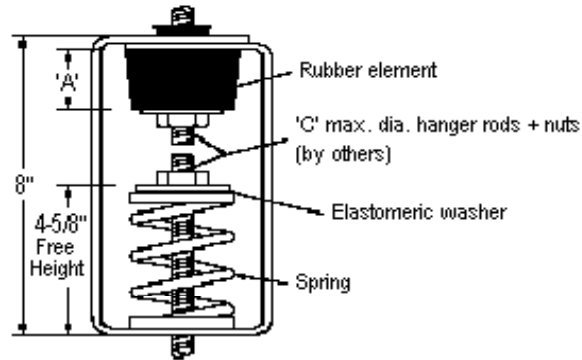




VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)	'C' (inches)
HNSA-A2-081	32	48	1 1/4	1/2
HNSA-A3-082	50	76	1 1/4	1/2
HNSA-A4-083	89	134	1 1/4	1/2
HNSA-B2-084	158	237	1 3/4	5/8
HNSA-B3-085	280	420	1 3/4	5/8
HNSA-B4-086	360	540	1 3/4	5/8
HNSA-B4-087	485	728	1 3/4	5/8

FEATURES

- * Load distribution steel washer
- * Embedded steel plates in rubber element for uniform loading.
- * Oil + water resistant rubber element
- * High deflection, low natural frequency
- * Spring / Rubber elements color-coded for easy field verification
(Rubber element color coding can be by 'dot' or 'complete element')
- * Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HNSA
Neo-Spring™ Hanger
(2.5" deflection)

Drawing no.
S-2400.12

Rev. 1