




# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



Not applicable with booster springs

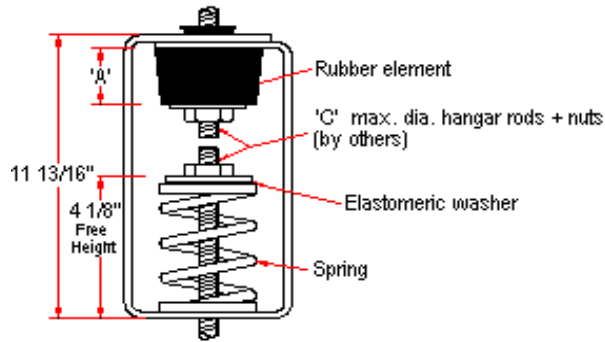

N.T.S.

## NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Contact factory for optional drilling to accept larger hanger rod sizes.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)	'A' (inches)	'C' (inches)
HNSE-A4-181	86	130	1 1/4	1/2
HNSE-B1-182	133	200	1 3/4	5/8
HNSE-B2-183	180	270	1 3/4	5/8
HNSE-B3-184	266	400	1 3/4	5/8
HNSE-C3-185	486	730	3 1/8	5/8
HNSE-C4-186	713	1070	3 1/8	5/8
HNSE-C4-187	926	1390	3 1/8	5/8
HNSE-C3-181-199	593	890	3 1/8	5/8
HNSE-C4-182-199	633	950	3 1/8	5/8
HNSE-C4-183-199	683	1025	3 1/8	5/8
HNSE-C4-184-199	783	1175	3 1/8	5/8
HNSE-C4-185-199	933	1400	3 1/8	5/8
HNSE-D2-186-199	1233	1850	3 1/8	3/4
HNSE-D2-187-199	1460	2190	3 1/8	3/4

## FEATURES

- \* Load distribution steel washer
- \* Embedded steel plates in rubber element for uniform loading.
- \* Oil + water resistant rubber element
- \* High deflection, low natural frequency
- \* Spring / Rubber elements color-coded for easy field verification  
(*Rubber element color coding can be by 'dot' or 'complete element'*)
- \* Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

Notes / Remarks :

Project :  
Client :  
Consultant :  
Representative :

Title :

**HNSE**  
**Neo-Spring™ Hanger**  
**(3.5" deflection)**

Drawing no.  
**S-2400.21**

Rev. 2