
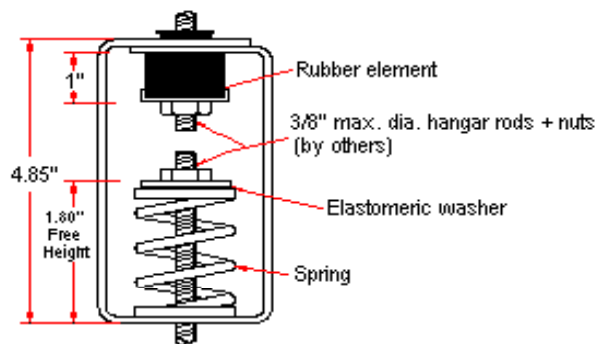




# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HNSF-HM-021	20	30
HNSF-HM-022	44	66
HNSF-HM-023	70	105
HNSF-HM-024	100	150

## FEATURES

- \* Oil + water resistant rubber element
- \* Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

## NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

Notes / Remarks :

Project :

Client :

Consultant :

Representative :

Title :

**HNSF**  
Neo-Spring™ Hanger  
(0.75" deflection)

Drawing no.

**S-2400.31**

Rev. 1