
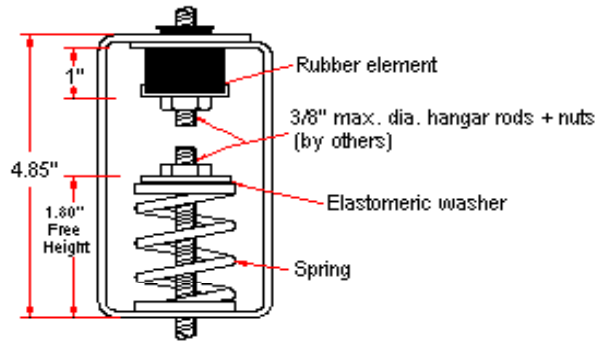




VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HNSF-HM-021	20	30
HNSF-HM-022	44	66
HNSF-HM-023	70	105
HNSF-HM-024	100	150

FEATURES

- * Oil + water resistant rubber element
- * Rubber element incorporates projected collar to prevent metal to metal contact between rod and bracket.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HNSF
Neo-Spring™ Hanger
(0.75" deflection)

Drawing no.
S-2400.31

Rev. 0