
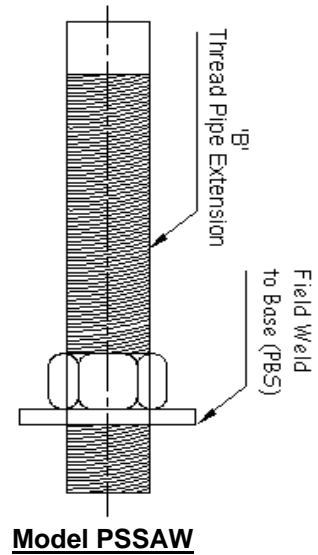


# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)

MODEL	PIPE SIZE (inches)	PART DIMENSIONS	
		B (pipe size)	D (inches)
PSSA(T/W)-25-P/G	2 1/2	1 1/2	2 1/2
PSSA(T/W)-30-P/G	3	1 1/2	2 1/2
PSSA(T/W)-35-P/G	3 1/2	1 1/2	2 1/2
PSSA(T/W)-40-P/G	4	2 1/2	3
PSSA(T/W)-50-P/G	5	2 1/2	3
PSSA(T/W)-60-P/G	6	2 1/2	3
PSSA(T/W)-80-P/G	8	2 1/2	3
PSSA(T/W)-100-P/G	10	2 1/2	3
PSSA(T/W)-120-P/G	12	2 1/2	3
PSSA(T/W)-140-P/G	14	3	4
PSSA(T/W)-160-P/G	16	3	4
PSSA(T/W)-180-P/G	18	4	6
PSSA(T/W)-200-P/G	20	4	6
PSSA(T/W)-240-P/G	24	4	6
PSSA(T/W)-300-P/G	30	4	6

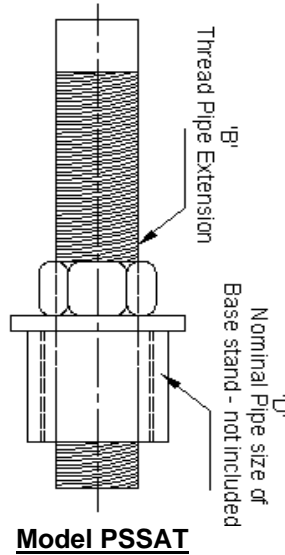

### MATERIALS

Item	Description
Pipe	Low carbon steel
Coupling	Malleable Cast Iron
Nut / Washer	Low carbon steel

### FEATURES

- \* Companion base stands available in customer specified heights allow for straight pipe runs over uneven floor grades.

### SPECIFICATIONS

- \* Complies with Federal Specification WW-H-171-E (Type 39)<sup>†</sup>
- \* Complies with Manufacturer's Standardization Society SP-69 & SP-58 (Type 38)<sup>†</sup>

<sup>†</sup> when used with model PSS or PSSU Pipe Saddle Support

### NOTES

1. Choose appropriate model for required finish:  
P - Plain , G - Electroplated
2. To select match dimension 'D' above with dimension 'B' on PBS/TBS base stand.  
(see drawing no. S-2733.36)

### APPLICATION

- \* Support of insulated / non-insulated, horizontal pipes running close to floor, where vertical adjustment is required.
- \* Model PSSAW typically used with PSS(U) Pipe Saddle Support and PBS PlainBase Stand.  
Model PSSAT typically used with PSS(U) Pipe Saddle Support and PBS PlainBase Stand.

Notes / Remarks :	Project :	<b>PSSAT / PSSAW</b> Pipe Saddle Support Adjuster Threaded / Welded Type	Drawing no. <b>S-2733.38</b>  Rev. 0
	Client :		
	Consultant :		
	Representative :		