


# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)



MODEL	PIPE SIZE (inches)	PART DIMENSIONS (inches)				MAX. LOAD (lbs)
		A	B	C	H	
ORPC-5-x	1/2	2 1/2	3/8 x 1 1/2	6	7/16	190
ORPC-7-x	3/4	2 1/2	3/8 x 1 1/2	7 5/16	7/16	190
ORPC-10-x	1	2 5/8	3/8 x 1 1/2	7 9/16	7/16	190
ORPC-12-x	1 1/4	2 13/16	3/8 x 1 1/2	7 7/8	7/16	190
ORPC-15-x	1 1/2	2 15/16	3/8 x 1 1/2	8 1/4	7/16	190
ORPC-20-x	2	3 3/16	3/8 x 1 3/4	9 1/8	7/16	420
ORPC-25-x	2 1/2	3 7/16	3/8 x 1 3/4	10 1/2	7/16	420
ORPC-30-x	3	3 3/4	3/8 x 1 3/4	11 1/8	7/16	420
ORPC-40-x	4	4 1/4	1/2 x 2	12 1/2	9/16	610
ORPC-50-x	5	4 3/4	1/2 x 2 1/4	13 3/4	9/16	610
ORPC-60-x	6	5 5/16	1/2 x 2 1/4	16 1/2	9/16	870
ORPC-80-x	8	6 5/16	1/2 x 2 1/2	18 5/8	9/16	870
ORPC-100-x	10	7 3/4	3/4 x 3	23	13/16	870
ORPC-120-x	12	8 3/4	3/4 x 3	25	13/16	870

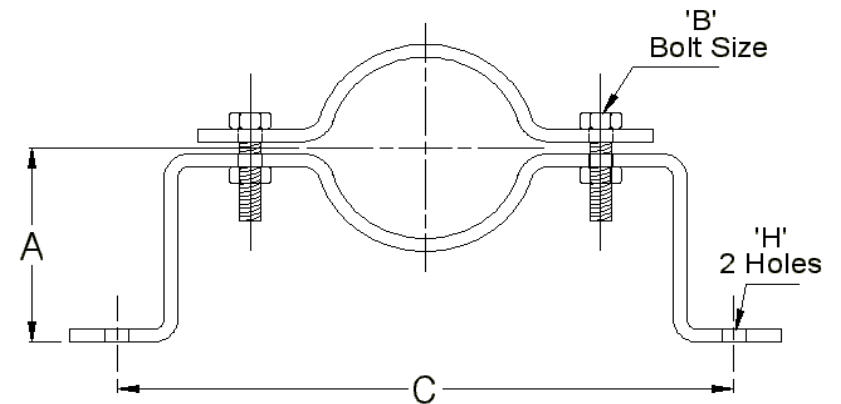

### NOTES

- Choose appropriate model for required finish:  
P-Plain. G-Electro Galvanized. H-Hot Dip Galvanized (non-threaded components only).
- Contact factory for copper pipe applications.
- Add "L" to model suffix to add 1/8" internal elastomeric lining (e.g. ORPCL). ID of lined clamp will reduce by 1/4"

### APPLICATION

- \* Support and stabilization of insulated / non-insulated pipe runs at a fixed distance away from wall or structure.

### MATERIALS

Item	Description
Clamp + Bracket	Low carbon steel
Bolt + nuts	Low carbon steel

### FEATURES

- \* Simple, quick installation.
- \* Bracket can be welded directly to structure or bolted in place using mounting holes which are furnished as standard.

Notes / Remarks :

Project :  
Client :  
Consultant :  
Representative :

Title :

**ORPC**  
Offset Riser Pipe Clamp

Drawing no.  
**S-2736.16**

Rev. 3