

VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

FEATURES

- * Air-cushioned isolation with liquid filled dampers
- * Low natural frequency (3-5 Hz at operating load)
- * High deflection
- * Neoprene padded top and bottom base
- * Heavy wall construction

BENEFITS

- * High lateral stability
- * Low maintenance
- * Extends machinery life
- * Combined resiliency and air prevents drift or permanent set
- * Wide load range available


APPLICATIONS

- * Air compressors
- * CMM machinery
- * Forging hammers
- * Industrial equipment, tools and machinery



MODEL NO.	LOAD RANGE (lbs)	PART DIMENSIONS (inches)
		A
AMB-25	1400 - 2500	11.80
AMB-45	2400-4500	15.70
AMB-75	4000-7500	19.70

Resilient Element	Neoprene
Metal Structure	Structural Steel
Environmental Data	-20 °F to + 180 °F

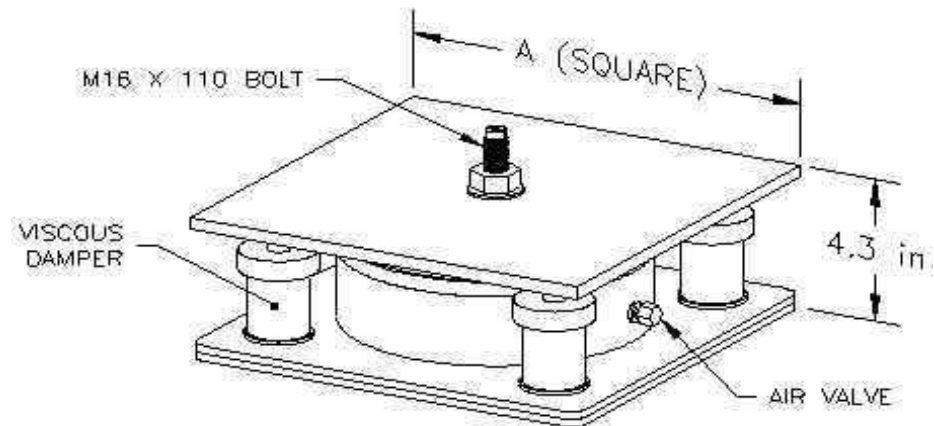

N.T.S.

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

AMB
Air Mount

Drawing no.
S-2900.02

Rev. 0