

VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

FEATURES



- * Air-cushioned isolation with internal viscous damping
- * Low natural frequency (3~5 Hz at operating load)
- * High deflection
- * Neoprene padded top and bottom base
- * Heavy wall construction

BENEFITS

- * High lateral stability
- * Low maintenance
- * Extends machinery life
- * Combined resiliency and air prevents drift or permanent set
- * Wide load range available

APPLICATIONS

- * Air compressors
- * CMM machinery
- * Forging hammers
- * Industrial euipment, tools and machinery

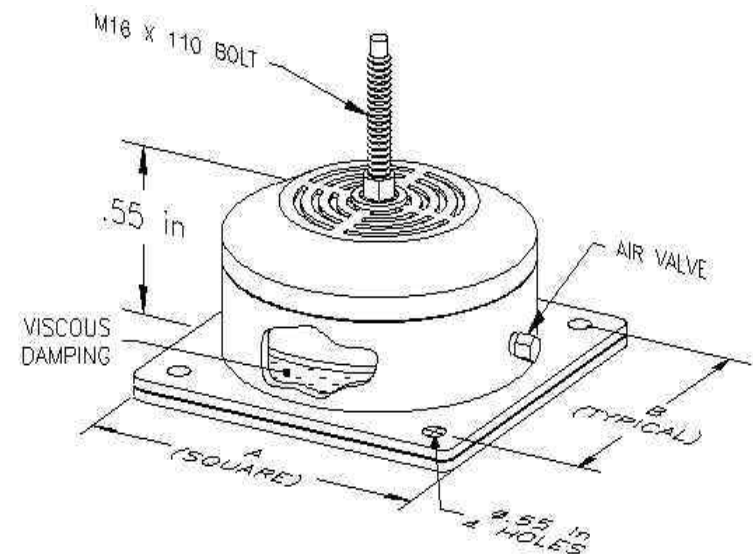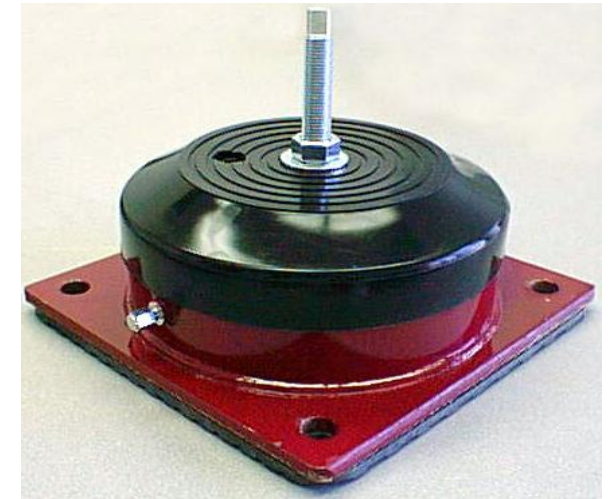

N.T.S.

MODEL NO.	LOAD RANGE (lbs)	PART DIMENSIONS (inches)	
		A	B
AMC-25	1400 - 2500	9.84	7.87
AMC-45	2400 - 4500	13.78	11.81

Resilient Element	Neoprene
Metal Structure	Structural Steel
Environmental Data	-20 °F to + 180 °F

Notes / Remarks :

Project :

Client :

Consultant :

Representative :

Title :

AMC
Air Mount

Drawing no.
S-2900.03

Rev. 0