


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

MODEL	CABLE DIA. (inches)	WEIGHT / 1000 ft (lbs)	CERTIFIED ULTIMATE BREAK STRENGTH (lbs)
SC-00-G	3/32	17	1050
SC-01-G	1/8	29	2000
SC-02-G	3/16	65	4200
SC-03-G	1/4	110	7200
SC-00-S	3/32	17	920
SC-01-S	1/8	29	1760
SC-02-S	3/16	65	3700
SC-03-S	1/4	110	6400

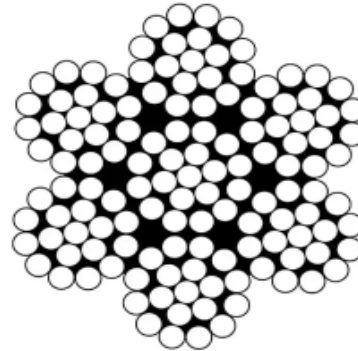


7x19 construction

Exclusively constructed of 7x19 strand core which offers greater flexibility, 2.5 times more wires, upto 81% more by weight, and upto 18% higher break strength than 7x7 construction offered by others.



7x7 construction



NOTES

1. SC-xx-G: Hot-dip galvanized steel
2. SC-xx-S: SS 304 stainless steel (standard) SS 316, SS316L (optional)
3. Standard spool length is 250'. Contact factory for longer spool lengths

APPLICATION

- * For use in code compliant and pre-engineered seismic cable bracing systems

FEATURES

- * Exclusively constructed of 7x19 strand core
- * Complies with ASCE 19 and SMACNA Restraint Manual as required by FEMA, NEHRP, IBC, OSHPD, UNC, BOCA, SBCCI, other Building Codes
- * Independent lab tested and verified
- * Exclusively constructed of 7x19 strand core

Notes / Remarks :

Project

Client

Consultant

Representative

Title :

SC
Seismic Cable

Drawing no.
S-3100.41

Rev. 1