


# VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A


INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)

MODEL	CABLE DIA. (inches)	WEIGHT / 1000 ft (lbs)	CERTIFIED ULTIMATE BREAK STRENGTH (lbs)
SC-00-G	3/32	17	1050
SC-01-G	1/8	29	2000
SC-02-G	3/16	65	4200
SC-03-G	1/4	110	7200
SC-00-S	3/32	17	920
SC-01-S	1/8	29	1760
SC-02-S	3/16	65	3700
SC-03-S	1/4	110	6400

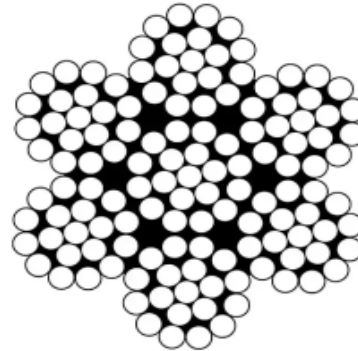


**7x19 construction**

Exclusively constructed of 7x19 strand core which offers greater flexibility, 2.5 times more wires, upto 81% more by weight, and upto 18% higher break strength than 7x7 construction offered by others.



~~7x7 construction~~



**NOTES**

1. SC-xx-G: Hot-dip galvanized steel
2. SC-xx-S: SS 304 stainless steel
2. Standard spool length is 250'. Contact factory for longer spool lengths

**APPLICATION**

- \* For use in code compliant and pre-engineered seismic cable bracing systems

**FEATURES**

- \* Exclusively constructed of 7x19 strand core
- \* Complies with ASCE 19 and SMACNA Restraint Manual as required by FEMA, NEHRP, IBC, OSHPD, UNC, BOCA, SBCCI, other Building Codes
- \* Independent lab tested and verified
- \* Exclusively constructed of 7x19 strand core

<u>Notes / Remarks :</u>	Project	Title : <b>SC</b> <b>Seismic Cable</b>	Drawing no. <b>S-3100.41</b>
	Client		
	Consultant		
	Representative		