


VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: www.vimco.biz

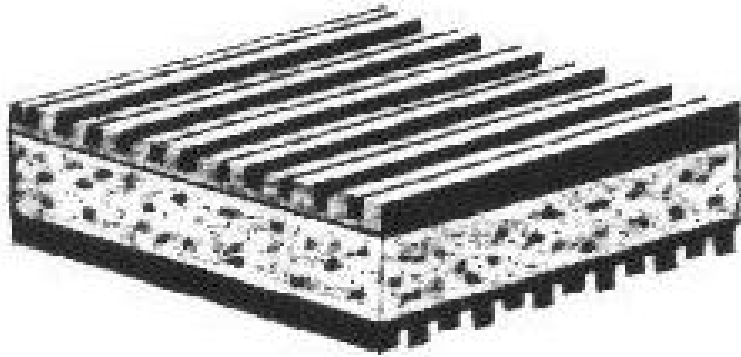

MODEL	SIZE (inches)
CRMP 181878	18" x 18" x 7/8"
CRMP 121278	12" x 12" x 7/8"
CRMP 080878	8" x 8" x 7/8"
CRMP 060678	6" x 6" x 7/8"
CRMP 040478	4" x 4" x 7/8"
CRMP 030378	3" x 3" x 7/8"
CRMP 020278	2" x 2" x 7/8"
CRMP 181801	18" x 18" x 1"
CRMP 121201	12" x 12" x 1"
CRMP 080801	8" x 8" x 1"
CRMP 060601	6" x 6" x 1"
CRMP 040401	4" x 4" x 1"
CRMP 030301	3" x 3" x 1"
CRMP 020201	2" x 2" x 1"
CRMP 181802	18" x 18" x 2"
CRMP 121202	12" x 12" x 2"
CRMP 080802	8" x 8" x 2"
CRMP 060602	6" x 6" x 2"
CRMP 040402	4" x 4" x 2"
CRMP 030302	3" x 3" x 2"
CRMP 020202	2" x 2" x 2"
CRMP SSSSSS	SPECIAL (contact factory)

APPLICATION


- * Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)
- * Recommended for acoustic problem applications.

NOTES

1. Material: Special Rubber + Low-Density Cork + Special Rubber
2. Maximum loading: 60 lbs/sq.in.
3. Working range: 15 to 55 lbs/sq.in.

FEATURES

- * Alternate High-Low Rib construction.
- * Excellent sound attenuation capability.
- * No bolting required.
- * Simple field installation.



Notes / Remarks :	Project :		Title : CRMP Cork-Rubber Mounting Pad	Drawing no. S-2200.01
	Client :			
	Consultant :			
	Representative :			
			Rev. 0	